




TDA-RGL25N

ELEVATOR TRACTION MACHINE


Suspension	2 : 1
Voltage	380V
Pole	20
Rating	S5 (40%)
INS. Class	F
IP Code	IP41
PZ1600B Brake	DC110V 2×1.8A
Max. Static Load	3800 kg
Weight	360 kg

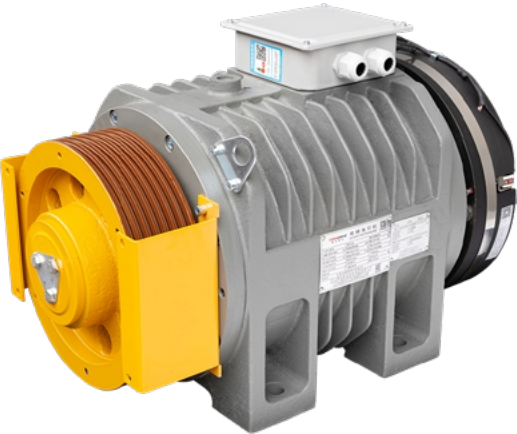

TECHNICAL DATA

Spec	Load (kg)	Lift Speed (m/s)	Sheave Dia.(mm)	Rope Groove (mm)	Current (A)	Torque (Nm)	Rated Speed (rpm)	Frequency (Hz)	Power (kW)
TDA-RGL25N-121P0-8MM		1.0			19.8	680	119	19.9	8.5
TDA-RGL25N-121P5-8MM	1292	1.5	φ 320	8×φ 8×12	30.3	680	179	29.8	12.7
TDA-RGL25N-121P7-8MM		1.75			32.8	680	209	34.8	14.9
TDA-RGL25N-122P0-8MM		2.0			38.9	680	239	39.8	17

DIMENSIONS

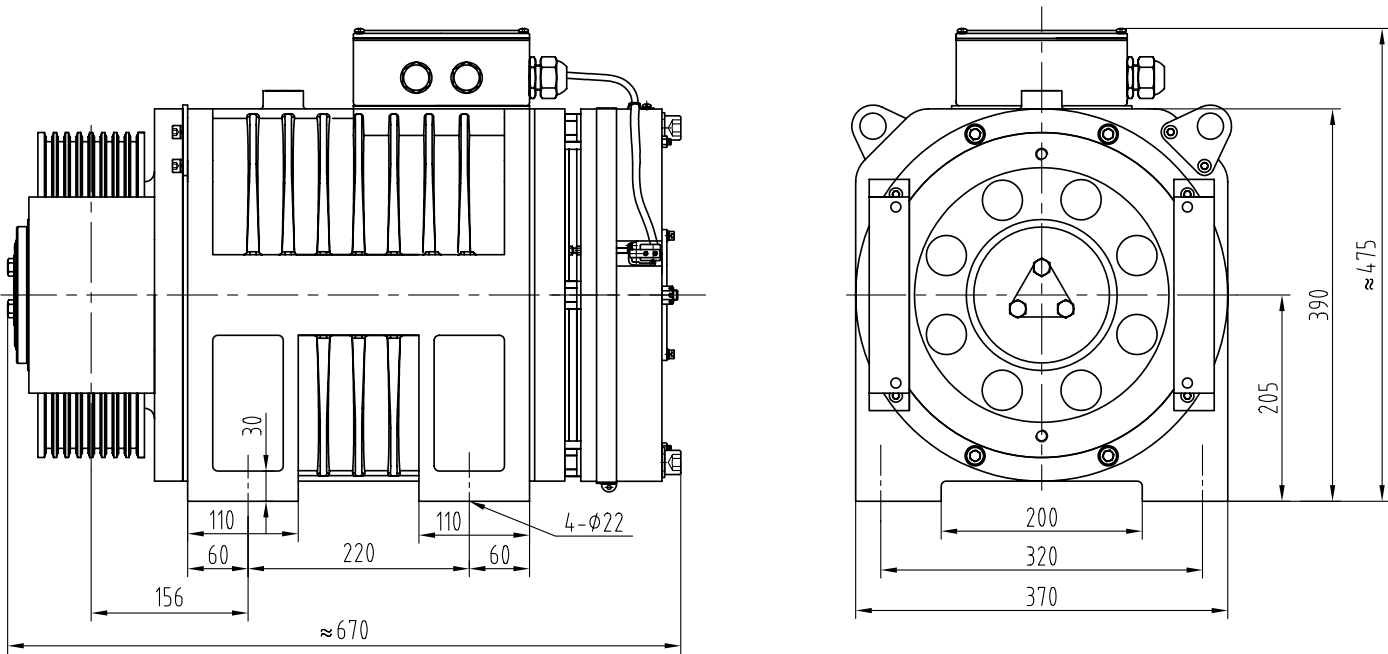

REMARK

The standard configuration of this machine does not include manual brake release. Customers are required to provide their own electric brake release device.
The manual brake release is optional to provide if the customer need it.