




TDA-RGL35

ELEVATOR TRACTION MACHINE



Suspension	2 : 1
Voltage	380V
Pole	32
Rating	S5 (40%)
INS. Class	F
IP Code	IP41
PZ2500B Brake	DC110V 2×2.1A
Max. Static Load	5500 kg
Weight	450 kg

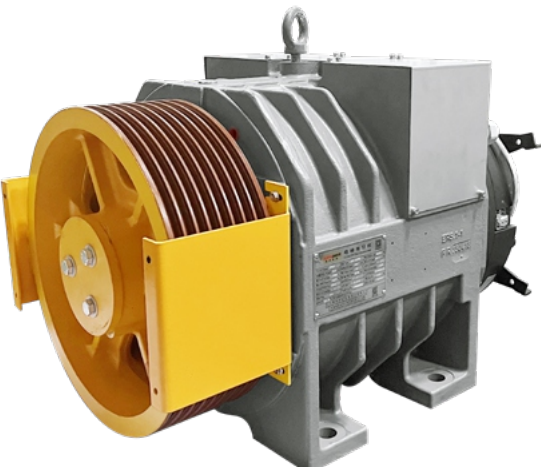

TECHNICAL DATA

Spec	Load (kg)	Lift Speed (m/s)	Sheave Dia.(mm)	Rope Groove (mm)	Current (A)	Torque (Nm)	Rated Speed (rpm)	Frequency (Hz)	Power (kW)
TDA-RGL35-112P5-10MM	1156	2.5	ø400	6×ø10×16	47	730	239	63.7	18.3
TDA-RGL35-113P0-10MM		3.0	ø450		56.2	820	255	68	21.9
TDA-RGL35-122P5-10MM	1292	2.5	ø400	7×ø10×16	50.7	795	239	63.7	19.9
TDA-RGL35-123P0-10MM		3.0	ø450		57.5	890	255	68	23.8
TDA-RGL35-131P0-10MM	1360	1.0	ø400	7×ø10×16	24	855	96	25.6	8.6
TDA-RGL35-131P5-10MM		1.5			40.3	855	143	38.1	12.8
TDA-RGL35-131P7-10MM		1.7			40.3	855	167	44.5	15
TDA-RGL35-132P0-10MM		2.0			44.1	855	191	50.9	17.1
TDA-RGL35-132P5-10MM		2.5			54.5	855	239	63.7	21.4
TDA-RGL35-133P0-10MM		3.0			62.3	965	255	68	25.8
TDA-RGL35-161P0-10MM		1.0			27	1015	96	25.6	10.2
TDA-RGL35-161P5-10MM		1.5			47	1015	143	38.1	15.2
TDA-RGL35-161P7-10MM		1.7			47	1015	167	44.5	17.7
TDA-RGL35-162P0-10MM		2.0			50.4	1015	191	50.9	20.3
TDA-RGL35-162P5-10MM		2.5			64	1015	239	63.7	25.4

DIMENSIONS

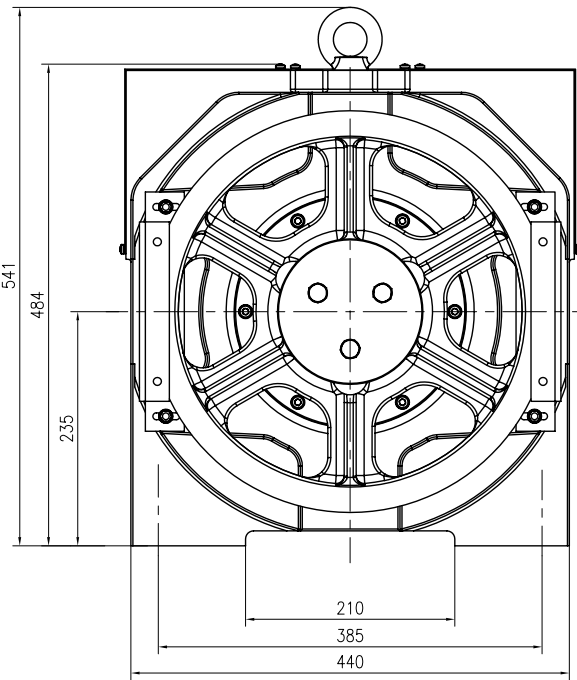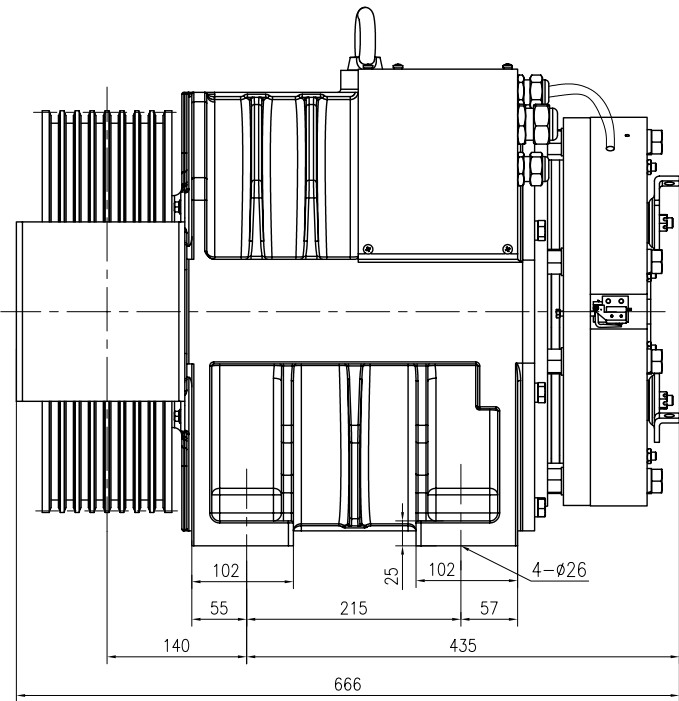

REMARK

The standard configuration of this machine does not include manual brake release. Customers are required to provide their own electric brake release device.
The manual brake release is optional to provide if the customer need it.